

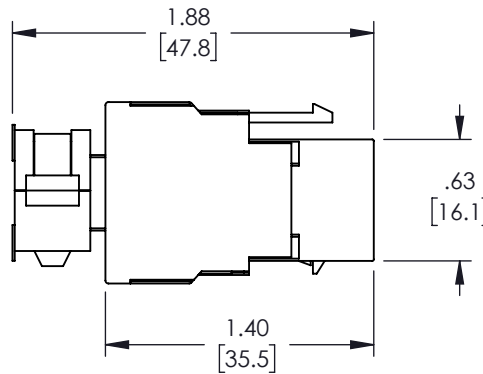


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/11/2022	DGUITADAURO

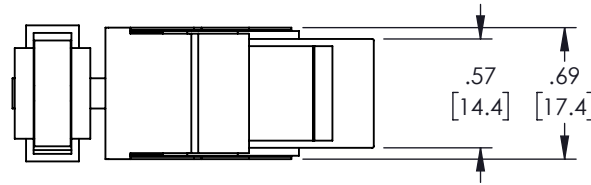



NOTES:

- CAT5E SHIELDED 180D KEYSTONE JACK
- COLOR: WHITE
- ELECTRICAL:**
CONTACT RESISTANCE: 20m OHM
- INSULATION RESISTANCE: <=100M OHM @100VDC
- WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, IMIN
- CAT5E PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10
- ENVIRONMENTAL:**
STORAGE: -40°/ +70°
- OPERATION: -10°/ +60°
- MECHANICAL:**
SHIELDED MATERIAL: STAINLESS STEEL
- PLASTIC MATERIAL: NEW PC
- GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
- TERMINAL PINS: PHOSPHOR BRONZE, ZINC PLATING
- RJ45 CONTACT LIFE: 750 TIMES MIN
- IDC TERMINAL LIFE: 250 TIMES MIN

MODEL NUMBER	DESCRIPTION
00407098	CAT5E FTP 180 KEYSTONE JACK, 10 PACK, SHIELDED
00407099	CAT5E FTP 180 KEYSTONE JACK, 15 PACK, SHIELDED
00407100	CAT5E FTP 180 KEYSTONE JACK, 25 PACK, SHIELDED

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY DMAY	DATE 6/30/2022	 an INFINIT® brand 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363
	CHECKED BY HBAKKE	DATE 7/11/2022	
THIRD-ANGLE PROJECTION 	APPROVED BY DGUITADAURO	DATE 7/11/2022	PRODUCT DESCRIPTION CAT5E FTP 180 KEYSTONE JACK, 5 PACK, SHIELDED
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	SIZE A
SCALE: NONE		CAGE CODE 7UTA6	ITEM NO. 810100703318
SHEET 1 OF 1		CAD FILE: 810100703318.SLDDRW	