

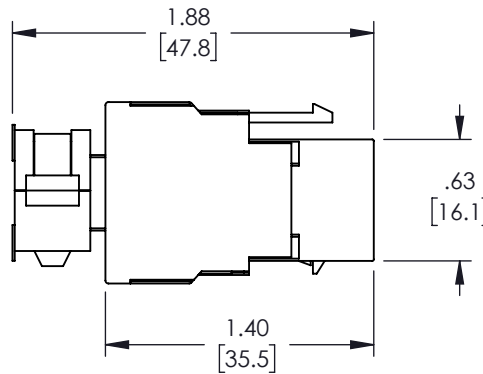


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/11/2022	DGUITADAURO

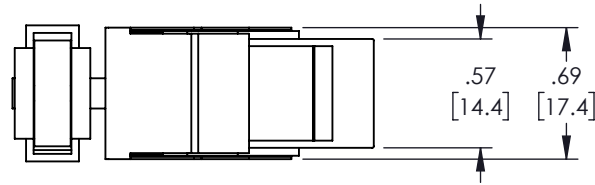



NOTES:

1. CAT6 SHIELDED 180D KEYSTONE JACK
2. COLOR: WHITE
- ELECTRICAL:**
3. CONTACT RESISTANCE: 20m OHM
4. INSULATION RESISTANCE: <=250M OHM @100VDC
5. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, IMIN
6. CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10
- ENVIRONMENTAL:**
7. STORAGE: -40°/ +70°
8. OPERATION: -10°/ +60°
- MECHANICAL:**
9. SHIELDED MATERIAL: STAINLESS STEEL
10. PLASTIC MATERIAL: NEW PC
11. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
12. TERMINAL PINS: PHOSPHOR BRONZE, ZINC PLATING
13. RJ45 CONTACT LIFE: 750 TIMES MIN
14. IDC TERMINAL LIFE: 250 TIMES MIN

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

MODEL NUMBER	DESCRIPTION
00407101	CAT6 FTP 180 KEYSTONE JACK, 10 PACK, SHIELDED
00407102	CAT6 FTP 180 KEYSTONE JACK, 15 PACK, SHIELDED
00407103	CAT6 FTP 180 KEYSTONE JACK, 25 PACK, SHIELDED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY DMAY CHECKED BY HBAKKE APPROVED BY DGUITADAURO	DATE 6/30/2022 7/11/2022 7/11/2022	 an INFINIT® brand 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY TELECOM/MODULAR	PRODUCT DESCRIPTION CAT6 FTP 180 KEYSTONE JACK, 5 PACK, SHIELDED
THIRD-ANGLE PROJECTION 	SIZE A	CAGE CODE 7UTA6	ITEM NO. 810100703325