


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/11/2022	DGUTTADAURO

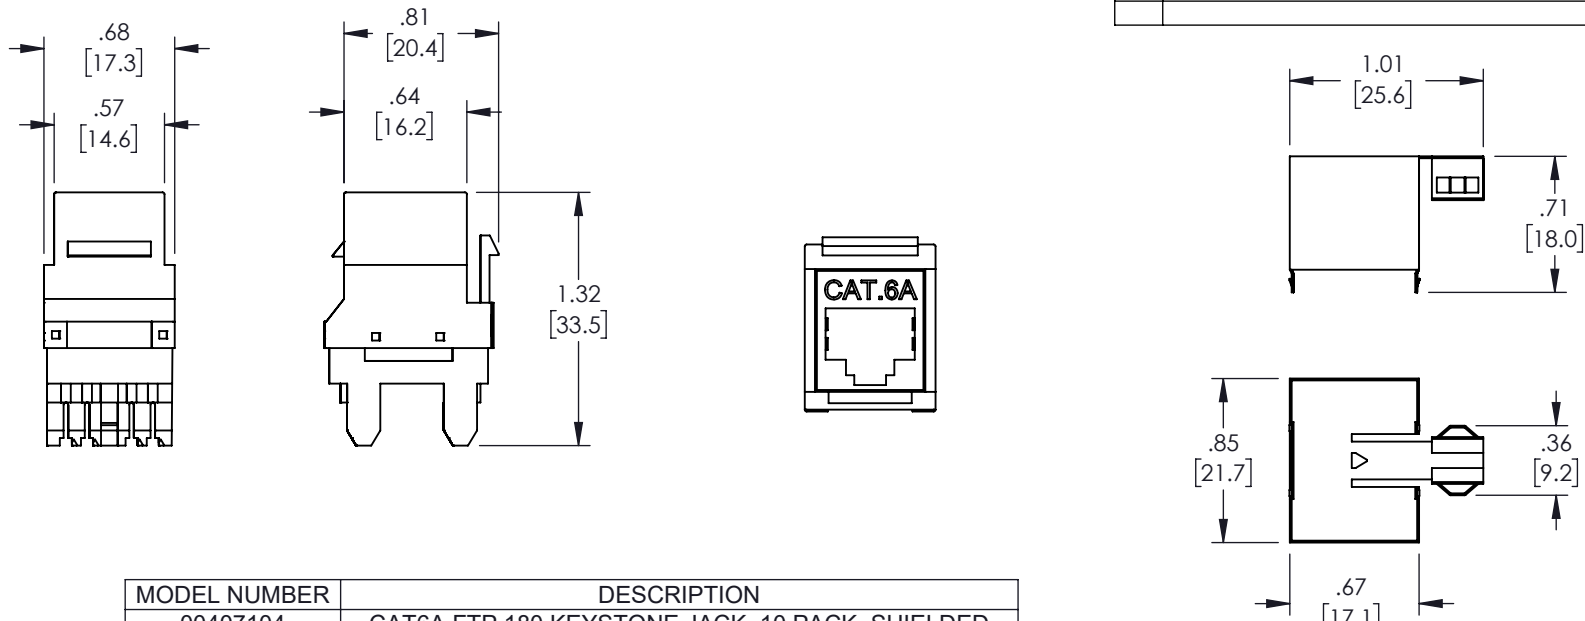

MODEL NUMBER	DESCRIPTION
00407104	CAT6A FTP 180 KEYSTONE JACK, 10 PACK, SHIELDED
00407105	CAT6A FTP 180 KEYSTONE JACK, 15 PACK, SHIELDED
00407106	CAT6A FTP 180 KEYSTONE JACK, 25 PACK, SHIELDED

- NOTES:**
- CAT6 SHIELDED 180D KEYSTONE JACK
  - COLOR: WHITE
  - ELECTRICAL:**  
CONTACT RESISTANCE: 20m OHM  
INSULATION RESISTANCE: <=250M OHM @100VDC  
WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, I MIN
  - CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B.2-10
  - ENVIRONMENTAL:**  
STORAGE: -40°/ +70°  
OPERATION: -10°/ +60°
  - MECHANICAL:**  
SHIELDED MATERIAL: COPPER SHELL  
PLASTIC MATERIAL: NEW PC  
GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"  
TERMINAL PINS: PHOSPHOR BRONZE, ZINC PLATING  
RJ45 CONTACT LIFE: 750 TIMES MIN  
IDC TERMINAL LIFE: 250 TIMES MIN

**REGULATORY COMPLIANCE:**  
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE	 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363
	OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0	DRAWN BY DMAY	
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [1.3]	CHECKED BY HBAKKE	7/11/2022	CATEGORY <b>TELECOM/MODULAR</b>
	APPROVED BY DGUTTADAURO	7/11/2022	
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION <b>CAT6A FTP 180 KEYSTONE JACK, 5 PACK, SHIELDED</b>	SIZE <b>A</b>   CAGE CODE <b>7UTA6</b>   ITEM NO. <b>810100703332</b>   REV. <b>A</b>
	COLOR VARIATIONS MAY OCCUR	SCALE: NONE   CAD FILE: 810100703332.SLDDRW	