
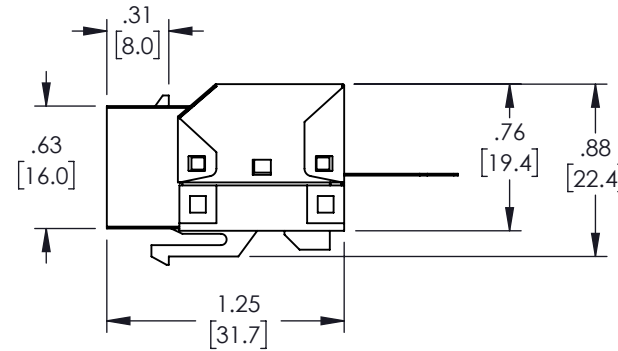
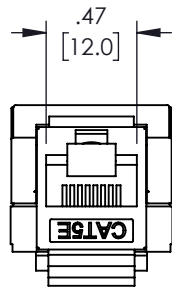
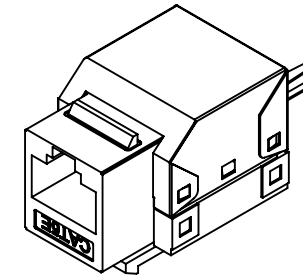


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/11/2022	DGUTTADAURO

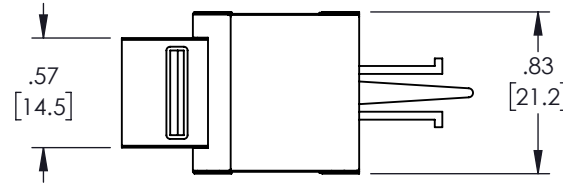



**NOTES:**

- CAT5E SHIELDED 90D KEYSTONE JACK
- COLOR: BLACK
- ELECTRICAL:**  
CONTACT RESISTANCE: 20m OHM
- INSULATION RESISTANCE: <=100M OHM @100VDC
- WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, IMIN
- CAT5E PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10
- ENVIRONMENTAL:**  
STORAGE: -40°/ +70°
- OPERATION: -10°/ +60°
- MECHANICAL:**  
SHIELDED MATERIAL: COPPER SHELL
- PLASTIC MATERIAL: NEW PC
- GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
- TERMINAL PINS: PHOSPHOR BRONZE, ZINC PLATING
- RJ45 CONTACT LIFE: 750 TIMES MIN
- IDC TERMINAL LIFE: 250 TIMES MIN

**REGULATORY COMPLIANCE:**

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

MODEL NUMBER	DESCRIPTION
00407107	CAT5E FTP 90 KEYSTONE JACK, 10 PACK, SHIELDED
00407108	CAT5E FTP 90 KEYSTONE JACK, 15 PACK, SHIELDED
00407109	CAT5E FTP 90 KEYSTONE JACK, 25 PACK, SHIELDED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]      FRACTIONS ± 1/32 .XX = ± .02 [5]    ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY DMAY CHECKED BY HBAKKE APPROVED BY DGUTTADAURO	DATE 6/30/2022 07/11/2022 7/11/2022	 an INFINIT® brand 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR		CATEGORY TELECOM/MODULAR
THIRD-ANGLE PROJECTION 		PRODUCT DESCRIPTION CAT5E FTP 90 KEYSTONE JACK, 5 PACK, SHIELDED	SCALE: NONE CAD FILE: 810100703349.SLDDRW SHEET 1 OF 1
SIZE <b>A</b>		CAGE CODE <b>7UTA6</b>	ITEM NO. <b>810100703349</b>
REV. <b>A</b>		REV.	