
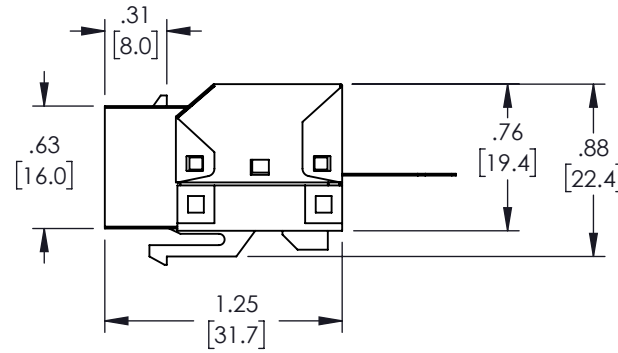




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/11/2022	DGUTTADAURO

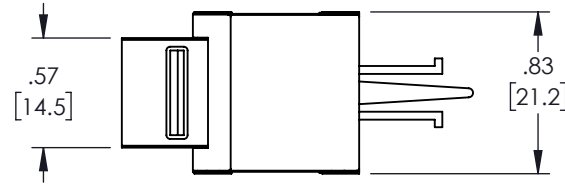



NOTES:

1. CAT6 SHIELDED 90D KEYSTONE JACK
2. COLOR: BLACK
- ELECTRICAL:**
3. CONTACT RESISTANCE: 20m OHM
4. INSULATION RESISTANCE: <=100M OHM @100VDC
5. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, IMIN
6. CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10
- ENVIRONMENTAL:**
7. STORAGE: -40°/ +70°
8. OPERATION: -10°/ +60°
- MECHANICAL:**
9. SHIELDED MATERIAL: COPPER SHELL
10. PLASTIC MATERIAL: NEW PC
11. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
12. TERMINAL PINS: PHOSPHOR BRONZE, ZINC PLATING
13. RJ45 CONTACT LIFE: 750 TIMES MIN
14. IDC TERMINAL LIFE: 250 TIMES MIN

MODEL NUMBER	DESCRIPTION
00407110	CAT6 FTP 90 KEYSTONE JACK, 10 PACK, SHIELDED
00407111	CAT6 FTP 90 KEYSTONE JACK, 15 PACK, SHIELDED
00407112	CAT6 FTP 90 KEYSTONE JACK, 25 PACK, SHIELDED

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY DMAY	DATE 6/30/2022	 an INFINIT® brand 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363
	CHECKED BY HBAKKE	DATE 7/11/2022	
THIRD-ANGLE PROJECTION 	APPROVED BY DGUTTADAURO	DATE 7/11/2022	PRODUCT DESCRIPTION CAT6 FTP 90 KEYSTONE JACK, 5 PACK, SHIELDED
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	SIZE A
CAGE CODE 7UTA6		ITEM NO. 810100703356	REV. A
SCALE: NONE		CAD FILE: 810100703356.SLDDRW	SHEET 1 OF 1