




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NAVEPOINT, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/17/22	GUTTADAURO

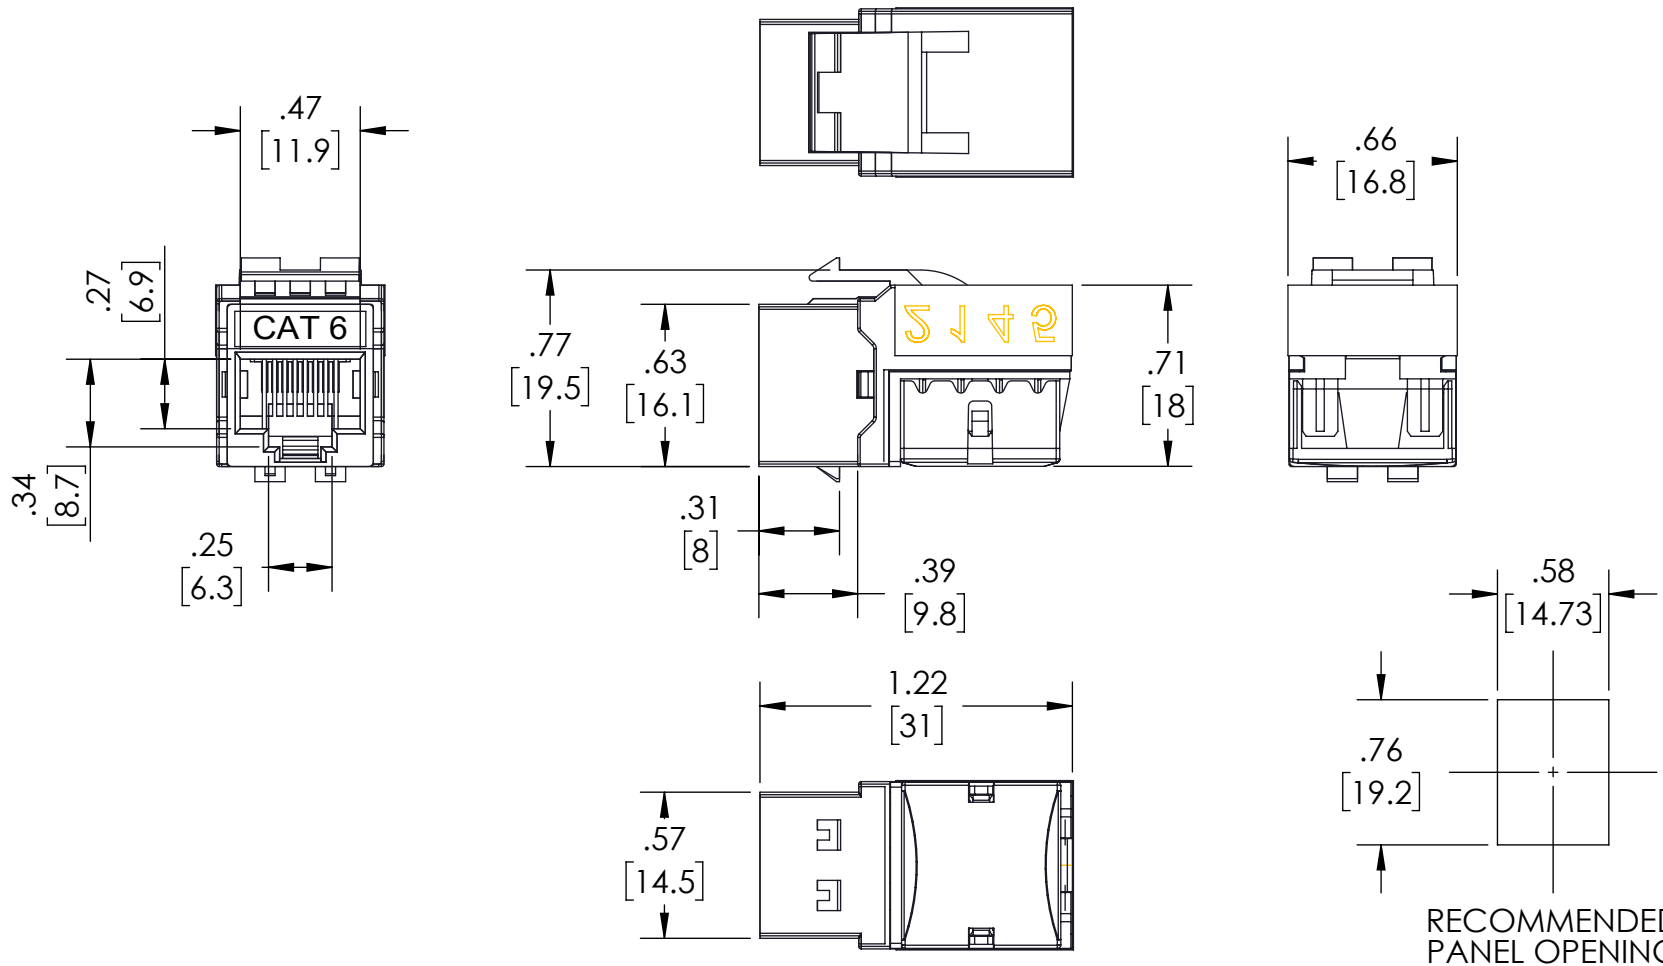

SPECIFICATION:

1. HOUSING MATERIAL: PC
2. CONTACT MATERIAL : GOLD PLATED PHOSPHOR BRONZE.
3. T568A & T568B WIRING.
4. STORAGE TEMPERATURE: -40°C TO 70°C.
5. OPERATION TEMPERATURE: -10°C TO 60°C.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 an INFINITI® brand 859 E. Park Avenue, Libertyville, IL 60048 USA. Phone: 1.800.505.1363
	DRAWN BY PSRINIVAS CHECKED BY VCHAN APPROVED BY GUTTADAURO	05/17/22 05/17/22 05/17/22	
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION 90 Degree C6 Keystone Jacks	SCALE: NONE CAD FILE: CAT6-U-UTP-90.SLDDRW SHEET 1 OF 1
SIZE A	CAGE CODE 7UTA6	ITEM NO. CAT6-U-UTP-90	REV. A